Magnetic Pickups

Convert engine speed to an AC voltage. Compatible with Woodward electronic governing systems and speed switches



Features:

- No moving parts
- · Self powered
- 5/8 and 3/4 thread sizes
- Withstands extreme temperature range
- Endures shock and vibration
- Choice of wire leads or cable connectors

Order Information:

Without Cable Assembly*

| ORDER NO. | Mounting Thread | Overall Length (mm) | Coil Resistance ohms @ 78°F | Inductance mH @ 1 Khz | Output Voltage Peak-to-Peak | Output Voltage VRMS |
|-----------|--------------------|------------------------|--------------------------------|--------------------------|--------------------------------|------------------------|
| SA-2170 | %–18 | 2.62" (66.6) | 144 to 230 | 85 | 17 | 6 |
| SA-2171A | ⁵%–18 | 3.63" (92.2) | 144 to 198 | 85 | 17 | 6 |

With Cable Assembly

| ORDER NO. | Mounting Thread | Overall Length (mm) | Coil Resistance Ohms @ 78°F | Inductance mH @ 1 KHZ | Output Voltage Peak-to-Peak | Output Voltage VRMS |
|-----------|--------------------|------------------------|--------------------------------|--------------------------|--------------------------------|------------------------|
| SA-4423 | ³⁄4 –16 | 3.00" (76.2) | 360 to 540 | 25 | 15 | 5.3 |
| SA-4424 | % –18 | 3.00" (76.2) | 40 to 85 | 25 | 8 | 2.8 |

Operating Temperature: -65°F to 225°F (-54°C to 107°C) Storage Temperature: -100°F to 225°F (-73°C to 107°C)

Test Conditions: Airgap: 0.015, Surface speed: 300 in/sec, Test wheel gear: 8 pitch, Load: 2.2k ohms.


*See facing page for ordering information


Specifications are for reference only.


E.E.C. Directive Compliance: All parts supplied by Woodward are classified as components, and therefore are not "CE" marked. Please contact factory direct for details on specific product compliance with 89/336/EEC and 89/392/EEC directives.


phone: 847-967-7730

Magnetic Pickups

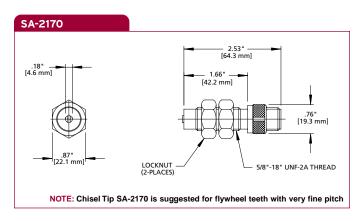



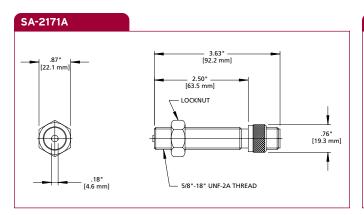

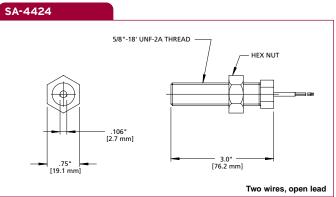


Use Woodward magnetic pickups with electronic speed switches for the input signal normally obtained from a gear tooth. Models SA-4423 and SA-4424 come with cable assembly for connection to the speed switch. For connection of Models SA-2170 and SA-2171A, cable lengths from 3 to 50 feet are available.

Accessories

Connector and Cable Assembly

Used with SA-2170 and SA-2171A only. Order separately.

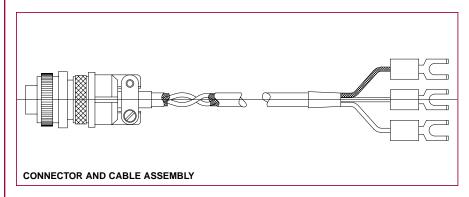

| ORDER NO. | Cable Length | | |
|-------------|--------------|--|--|
| SA-1707-003 | 3' (0.9m) | | |
| SA-1707-008 | 8' (2.4m) | | |
| SA-1707-010 | 10' (3.1m) | | |
| SA-1707-014 | 14' (4.3m) | | |
| SA-1707-015 | 15' (4.6m) | | |
| SA-1707-020 | 20' (6.1m) | | |
| SA-1707-030 | 30' (9.2m) | | |
| SA-1707-035 | 35' (10.7m) | | |
| SA-1707-050 | 50' (15.3m) | | |